

# E<sup>2</sup>H90 SERIES


## Self-Contained Electro-Hydraulic Rotary Actuator

Designed & engineered for severe-service applications

- Torques up to 4,000,000 in-lbs
- On/Off Service
- Fail Last, Fail Close or Fail Open



# Design & Materials

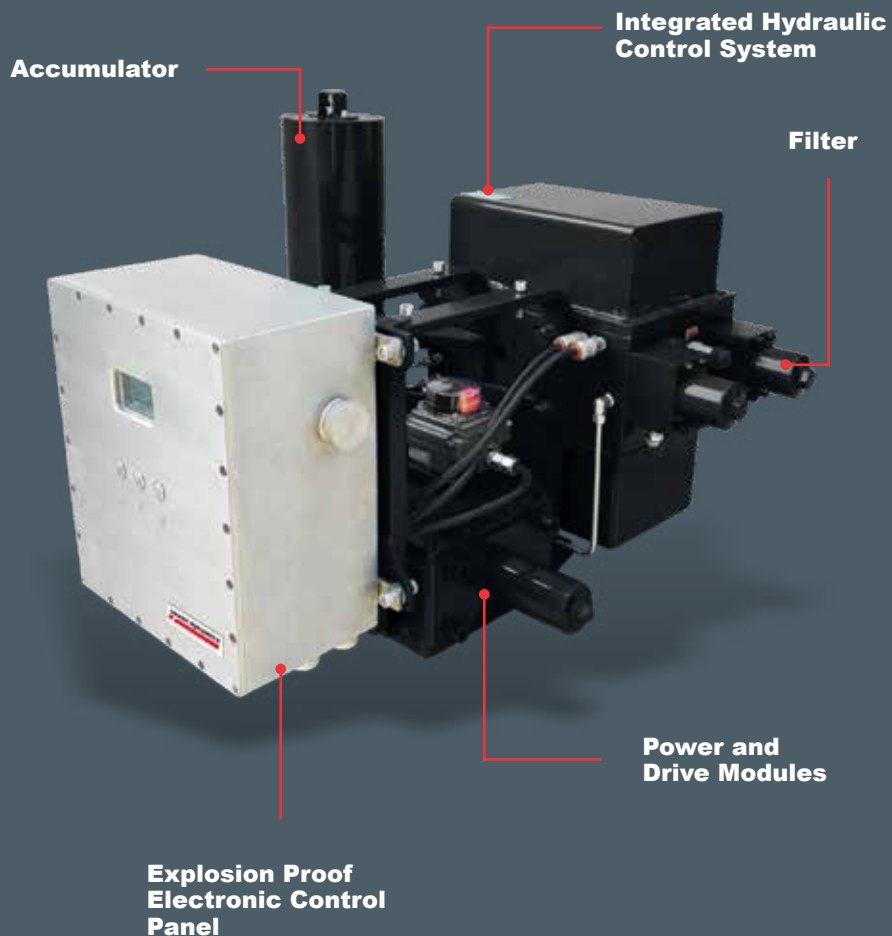

### Power and Drive Module

- Quarter turn stroke: -5° to 95° adjustable
- The cylinder features dual seals to guarantee zero leakage
- Symmetric and canted yokes are available to satisfy various valve torque profiles

# Specifications

Cowan E<sup>2</sup>H90 Series Self-Contained Electro-Hydraulic Rotary Actuators are used for industrial fields where highly reliable controlled valves are required. They are used to drive angular-stroke valves, linear-stroke valves, and lifting-lever-type ball valves.



- **Operating Pressure: 3000 psi**
- **Operating Voltage: 220 VAC, and any global 3-Phase voltage ratings (Solar Power optional)**
- **Rated Power Consumption: *Static: 5W Pump Motor Start: 240 W, 160 W***
- **Explosion Proof Level: Ex d IIB T4**
- **Ingress Protection Level: IP65**
- **S5 Category duty cycle motor (15-minute duty)**
- **ESD, LBP, PST functions available**
- **Manual override is standard**
- **Dual Hydraulic Filtering System: allows ease of maintenance**

# Electronic Control System

The electronic control system of the electro-hydraulic actuator monitors the hydraulic pressure of the system in real time and automatically controls the starting and stopping of the pump.


## Options

- Manual override
- Remote & local function
- Fail-safe with accumulator
- Line break protection (LBP) function available
- Partial stroke test

# Independent and Adjustable Open/Close Time

The system flow rate is designed to be 20L/min. For example, the measured ESD time of a size 09 electro-hydraulic actuator is less than three seconds. By independently setting an open/close adjustment valve in the hydraulic control system, the time to operate the valve can be strictly controlled. For example it can close or open the valve in a natural gas pipeline quickly (less than 10s) to block it, or slowly close (more than 120s) the valve to avoid the water hammer effect in a production oil pipeline.

# How to Order

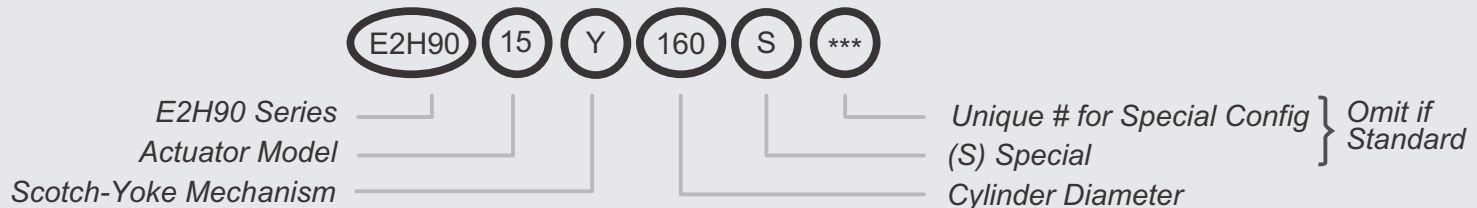

TORQUE OUTPUT								
Actuator Model	03	06	09	15	30	60	100	200
Maximum Output Torque (in-lb)	39,828	79,657	119,485	199,142	398,284	796,567	1,327,612	2,655,224
Cylinder Diameter (mm)	60, 80, 100, 125, 160, 200, 240							

**Related materials**

Visit our website to download or request a printed catalogue.



**Solutions Include:**

**Valve Actuators**

**Fail-Safe Systems**

**Digital Process Control Panels**

**Pneumatic Process Control Panels**

**For sales and technical information,  
Contact us at:**

**Head Office/Factory:**

6194 Notre Dame West  
Montreal, Quebec H4C 1V4  
TOLL-FREE: 855-341-3415  
info@cowandynamics.com

**Sales Offices:**

Mississauga, Ontario  
T: +1-905-208-0985  
info@cowandynamics.com

**LATAM Office**

T: +1-514-553-2328  
info@cowandynamics.com

**f** /cowandynamics

**in** /company/cowan-dynamics

**YouTube** /cowandynamics

